







Sun Odyssey 379



Sun Odyssey 409



Sun Odyssey 439

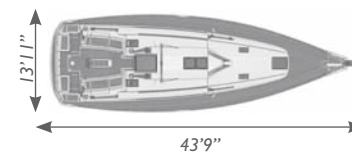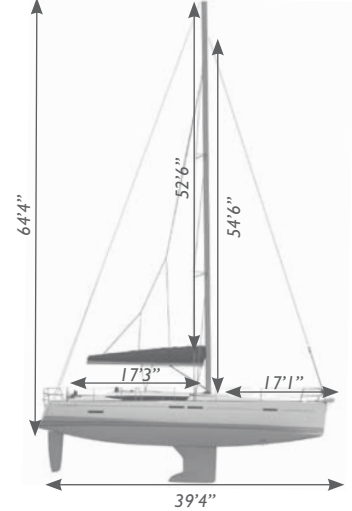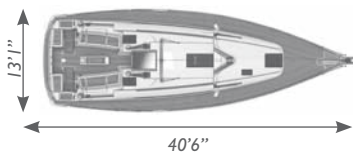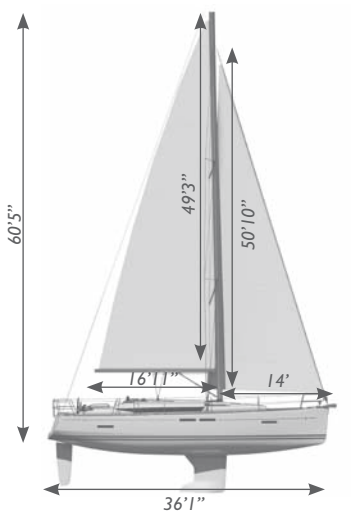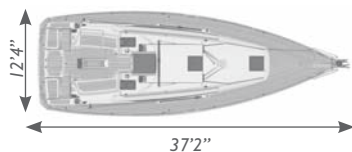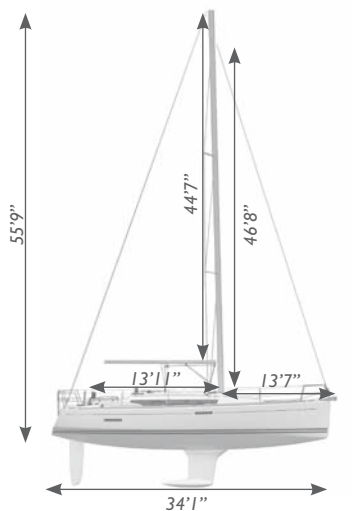

Certification conform with CE regulation.

	SO 379	SO 409	SO 439
<b>SPECIFICATIONS</b>			
<b>Overall length</b>	37'2"	40'6"	43'9"
<b>Hull length</b>	36'	39'4"	42'7"
<b>Waterline length</b>	34'1"	36'1"	39'4"
<b>Beam</b>	12'4"	13'1"	13'11"
<b>Displacement</b> light load with deep draft keel	14,771 lbs	16,427 lbs	21,785 lbs
<b>Standard draft</b> cast iron fin keel with elongated bulb and exterior epoxy barrier coat	6'4"	6'11"	7'3"
<b>Standard keel weight</b>	3,914 lbs	4,983 lbs	6,284 lbs
<b>Shoal draft</b> cast iron fin keel with elongated bulb and exterior epoxy barrier coat (double rudders on SO 379)	4'11"	5'1"	5'3"
<b>Shoal keel weight</b>	4,496 lbs	5,446 lbs	6,130 lbs
<b>Swing keel</b> epoxy coated iron keelbox with twin rudders	3'7" - 7'4"	-	-
<b>Swing keel weight</b>	5,100 lbs	-	-
<b>CE category</b>	A8 / B9	A9 / B10	A10 / B11
<b>Architect / designer</b>	M. Lombard	P. Briand	P. Briand
<b>Water</b> rotomolded tank located under forward berth with deck fill	200 L	330 L	330 L
<b>Fuel</b> rotomolded tank located under aft berth with deck fill	130 L	200 L	200 L
<b>Holding tank</b> rotomolded tank located in head compartment with valve for overboard discharge via gravity and deck fitting for pump out	80 L	80 L	80 L
<b>Fridge</b> fridge compartment with vertical access	185 L	185 L	185 L
<b>SAILS</b>			
Standard mainsail horizontally-cut in high-quality dacron	■ 377 sqft	■ 468 sqft	■ 533 sqft
Standard headsail 132% horizontally-cut in high-quality dacron	■ 377 sqft	-	-
Standard headsail 106% horizontally-cut in high-quality dacron	-	■ 350 sqft	■ 447 sqft
Lazy bag in Sunbrella® Taupe fabric with integrated lazy jacks	■	■	■
Performance Headsail 140% in triradial cut mylar/taffeta laminate	-	□ 496 sqft	□ 589 sqft
Performance Headsail 132% in triradial cut mylar/taffeta laminate	□ 377 sqft	-	-
Performance Headsail 106% in triradial cut mylar/taffeta laminate	-	□ 350 sqft	□ 447 sqft
Self-tacking jib in triradial cut mylar/taffeta laminate	□ 251 sqft	□ 303 sqft	□ 380 sqft
Performance Mainsail in triradial cut mylar/taffeta laminate	□ 377 sqft	□ 468 sqft	□ 533 sqft
Inmast furling horizontally-cut in high-quality dacron	□ 293 sqft	□ 368 sqft	□ 423 sqft
Code 0 in triradial cut mylar/aramid laminate	□ 594 sqft	□ 753 sqft	□ 822 sqft
Symmetrical spinnaker optimal size for the boat (sail not available)	1,065 sqft	1,270 sqft	1,549 sqft
Asymmetrical spinnaker optimal size for the boat (sail not available)	973 sqft	1,173 sqft	1,431 sqft

■ Standard □ Option - Not available

	SO 379	SO 409	SO 439
<b>SAIL HANDLING</b>			
<b>Genoa winches</b> 2 x Harken 40.2 self-tailing winches	■	-	-
<b>Genoa winches</b> 2 x Harken 46.2 self-tailing winches	-	■	■
<b>Genoa winches</b> 2 x Harken 50.2 self-tailing winches	-	□	□
<b>Coachroof winch</b> Harken 35.2 self-tailing winch to port	■	-	-
<b>Coachroof winch</b> Harken 40.2 self-tailing winches to port	-	■	■
<b>Coachroof winch</b> Harken 35.2 self-tailing winch to starboard	*	-	-
<b>Coachroof winch</b> Harken 40.2 self-tailing winches to startboard	-	*	*
<b>Harken "Rewind" electric genoa winches</b> 2 x 46.2 winches that can sheet-in and sheet-out electrically	-	□	□
<b>Electric coachroof winch</b> 1 x Harken 40.2 12v self-tailing in place of standard winch to port	-	□	□
<b>Genoa tracks</b> adjustable Harken lead cars located on coachroof	-	■	■
<b>Genoa tracks</b> adjustable Harken lead cars (located on the side decks)	■	□	□
<b>Ball-bearing track</b> for self-tacking jib	□	□	□
<b>Winch handles</b> 2 x Harken handles with ball-bearing grip	■	■	■
<b>Mainsheet and genoa sheet</b> lead back to helm station with Spinlock jammers	■	■	■
<b>Line jammers</b> Spinlock, on both sides of coachroof with return blocks	■	■	■
<b>Mainsheet traveller</b> roof-mounted traveller with ball-bearing cars, control lines lead aft to cockpit	■	■	■
<b>Spinnaker deck hardware</b> Spinlock jammers	*	*	*
<b>Asymmetrical spinnaker gear</b> halyard, 2 sheets, tack line lead forward on deck, Harken blocks	□	□	□
<b>Symmetrical spinnaker gear</b> halyard, 2 sheets, 2 guys, pole uphaul and downhaul, spinnaker pole and adjustable car for mast, Harken blocks	□	□	□
<b>MAST AND RIGGING</b>			
<b>Classic mast</b> aluminium with double spreaders	■	■	■
<b>Furling mast</b>	□	□	□
<b>Standing rigging</b> discontinuous 1x19 stainless steel wire	■	■	■
<b>Standing rigging</b> discontinuous Dyform® stainless steel wire	▲	▲	▲
<b>Backstay</b> double	■	■	■
<b>Backstay</b> adjustable via mechanical adjuster	□	□	□
<b>Genoa furler</b> with double slot, attachment to stemhead fitting and furling line lead aft to port helm winch	■	■	■
<b>Running rigging</b> polyester topping lift, mainsail halyard, genoa halyard, mainsheet, genoa sheets	■	■	■
<b>Running rigging</b> Dyneema® mainsail halyard, genoa halyard, mainsheet, genoa sheets	▲	▲	▲
<b>Rigid boom vang</b> with gas cylinder and control line lead aft to the cockpit	*	*	■
<b>COCKPIT</b>			
<b>Wood inlay</b> on cockpit bench seating	■	■	■
<b>Wood cockpit</b> floor inlay	□	□	□
<b>Wood side decks</b> hand-laid wooden side decks	□	□	□
<b>Cockpit lockers</b> 1 locker under bench seat and 1 lazarette locker under the port helm seat	■	-	-
<b>Cockpit lockers</b> 2 lockers under bench seats and 1 lazarette locker under the port helm seat for technical access to steering system	-	■	■
<b>Liferaft locker</b> located in dedicated compartment between helm seats	90x59x34 cm	90x55x34 cm	90x54x34 cm
<b>Storage compartment for companionway door</b> in forward section of liferaft locker	-	■	■
<b>Storage compartment for companionway door</b> in cockpit locker	■	-	-
<b>Line lockers</b> under helm seats for lines from the primary winches, location for deck fills, cockpit speakers and shorepower inlet	-	■	■
<b>Fold down swim platform</b> with telescopic swim ladder	■	■	■
<b>Cockpit table</b> folding table with storage, cup holders, stainless steel handrail, courtesy lighting, 12v plug	N.A. pack	■	■
<b>Solid wood cockpit table</b> with all the same functions of the standard table, but with wooden leaves	□	□	□
<b>Gas locker</b> located in lazarette locker under starboard helm seat, room for 2 gas bottles with connection to gas system and cut-off valve under stove in the galley	■	■	■
<b>Wheels</b> 2 leather-covered steering wheels with compasses at each steering position and stainless steel grabrails	■	■	■
<b>Black, composite steering wheels</b>	□	□	□
<b>Emergency tiller</b> delivered with the boat, chrome fitting in cockpit floor	■	■	■
<b>Steering wheel covers</b> Sunbrella® Taupe with zips for easy removal	□	□	□
<b>Cockpit table cover</b> Sunbrella® Taupe (with or without GPS)	□	□	□
<b>Instrumentation</b> dedicated space for instruments within easy reach of helm positions, room for GPS chartplotter mounted at aft end of cockpit table with easy viewing from each helm	■	■	■
<b>Engine controls</b> throttle and engine control panel mounted at starboard helm, engine panel includes, RPM gauge, warning lights, ignition	■	■	■
<b>Cockpit shower</b> retractable hot and cold water shower with tap	N.A. pack	N.A. pack	■
<b>Cockpit cushions</b> Sunbrella® Taupe cushions for seating area with attachment clips	□	□	□
<b>Cockpit bimini</b> Sunbrella® Taupe with stainless steel bows, retractable with storage cover	-	-	□
<b>Cockpit sprayhood</b> wide Sunbrella® Taupe with vinyl windscreen with zip-out middle window for ventilation, retractable	-	-	□
<b>DECK HARDWARE</b>			
<b>Anchor locker</b> room for anchor and tackle, integrated windlass area, holder for windlass handle	■	■	■
<b>Bow pulpits</b> open, stainless steel	■	■	■
<b>Stern pulpits</b> stainless steel with flag holder, buoy bracket	■	■	■
<b>Outboard engine bracket</b> mounted on stern pulpit	□	□	□
<b>Electric windlass</b> Quick 1000W combination rope and chain, vertical-mounted in the anchor locker, hand-held remote, manual handle	N.A. pack	■	■
<b>Windlass control</b> second windlass control mounted in cockpit with chain counter for easy, short-handed anchoring	-	□	□
<b>Anchor roller</b> single stainless steel fitting	■	■	■
<b>Anchor roller</b> double stainless steel fitting with tack point reinforcement	■	■	N.A. pack
<b>Anchoring kit</b> Delta anchor 16kg with 28 meters of 10mm chain and 40 meters of 18mm line	□	-	-
<b>Anchoring kit</b> Delta anchor 20kg with 32 meters of 10mm chain and 45 meters of 18mm line	-	□	□
<b>Lifelines</b> double level of stainless steel lifelines, stainless steel stanchions	■	■	■
<b>Lifeline gates</b> opening gates on each side	N.A. pack	N.A. pack	□
<b>Toerail</b> and drainage for side deck	■	■	■
<b>Wood rubrail</b> for hull protection	-	-	□
<b>Vinyl rubrail</b> for hull protection	□	□	-
<b>Cleats</b> 4 x stainless steel mooring cleats forward and aft	■	■	■
<b>Midship cleats</b> 2 x stainless steel cleats placed on side deck	■	■	N.A. pack
<b>Mooring kit</b> fenders and docklines	□	□	□
<b>Handrails</b> sculpted, long wood handrails on coachroof for secure movement forward	■	■	■

▲ Performance package \* Navigation package ■ Standard □ Option - Not available

**TECHNICAL FEATURES AND OPTIONS**

**CONSTRUCTION**

<b>Deck</b> Prisma Process® injected deck, ISO gelcoat surface, discontinuous balsa block coring	■	■	■
<b>Hull</b> solid, hand-laid fibreglass, ISO gelcoat surface, protective barrier coat	■	■	■
<b>Structure</b> inner fibreglass grid, high-load zones cut out, drainage system through structure	■	-	-
<b>Structure</b> 3 <sup>rd</sup> generation inner fibreglass grid, high-load zones cut out and relaminated, drainage system through structure, special emergency repair zone in keel area	-	■	■

**LIGHTING**

LED navigation lights and anchor light	N.A. pack	N.A. pack	N.A. pack
Flush mounted LED chromed brass ceiling lights in saloon, head compartments and cabins	■	■	■
Leather-wrapped LED reading lights in forward cabin and aft cabin (s)	■	■	■
Indirect lighting under side decks in saloon and head compartments	■	■	■
Task LED lighting under furniture in saloon	-	□	□
Gooseneck chart light mounted at nav station	■	■	■

**ELECTRICAL**

12 v alternator output	80 A	80 A	80 A
Charge distributor/isolator	■	■	■
Engine start battery capacity, batteries located under aft berths	70 Ah	110 Ah	110 Ah
Domestic battery bank capacity, batteries located under aft berths	70 Ah	220 Ah	220 Ah
Extra 70 Ah domestic battery	N.A. pack	-	-
2 x Extra 110 Ah domestic battery	-	N.A. pack	N.A. pack
Positive battery switch for engine and domestic bank and general cut-off switch mounted on panel in aft cabin	■	■	■
Shorepower 110v inlet with differential breaker, one 110v plug per cabin, 110v plug in galley, saloon and nav station	■	■	■
40 A battery charger, multi-phase	■	-	-
60 A battery charger, multi-phase	-	■	N.A. pack
Inverter 2000 W12v/110v	-	-	□
Electrical panel with 12v breakers, 110v breakers, 12v ammeter, 12v consumption meter, 12v charging meter	■	■	■
<b>Solar panels</b> on coachroof 2 x 45W with charging relay	□	□	□
12 v plug per cabin and at nav station	■	■	■
110v stainless steel microwave, installed in galley cabinet	□	□	□

**PLUMBING**

Hot and cold pressurised water distributed through-out the boat via semi-rigid hose	■	■	■
"Heavy-duty" water pump and accumulator tank for consistent water pressure	■	■	■
40 litre hot water tank that is connected to engine heat exchanger and to 230 v electrical system	■	■	■
Chromed shower faucets in washrooms	■	■	■
Electric bilge pump on float switch and manual dual-action pump in the cockpit	■	■	■
Extra fresh water tank 130L located under aft starboard berth	□	-	-
Extra fresh water tank 200L located under aft starboard berth	-	□	N.A. pack
Digital water level display	■	■	■
Shower sumps equipped with individual electric pumps with filters and on-off switches	■	■	■
Large manual pump marine toilets	■	■	■
Electric Quiet-Flush toilets in place of standard, available for each head compartment	-	□	□
80 litre holding tank with gravity drain and deck fitting for forward starboard head (port aft head equipped with standard 80L tank)	-	□	□

**ENGINE AND STEERING**

Yanmar 3YM30 <b>29 HP</b> , 21Kw <b>Sail drive</b>	■	-	-
Yanmar 3JH5-CE <b>40 HP</b> , 29.4 Kw <b>Sail Drive</b>	-	■	-
Yanmar 4JH5-CE <b>54 HP</b> , 39.6 Kw <b>Sail Drive</b>	-	-	■
Compatible 360 Docking	-	■ POD 60	■ POD 90
Fully soundproofed engine compartment with engine access behind stairwell and from aft cabin	■	■	■
Fuel / water separator	■	■	■
Built-in muffler, forced air ventilation and stainless steel exhaust fitting aft	■	■	■
Fixed 3-blade propeller	■	■	■
Folding propeller, 3-blade, Flex-o-Fold	▲	▲	▲
Bow thruster 4.3hp/3.2kw installed in a tunnel with dedicated batteries	□	-	-
Bow thruster 9.5hp/7.1kw installed in a tunnel with dedicated batteries	-	□	□
Fibreglass rudder	■	■	■

**COMFORT FEATURES AND OPTIONS**

<b>Fixed hull ports</b> with shades	4	8	8
<b>Opening cockpit and roof ports</b>	2	2	2
<b>Lateral fixed windows</b>	6	6	6
<b>Opening ports integrated into lateral windows</b>	2	2	2
<b>Opening deck hatches</b>	4	6	7
<b>Combination shade/insect screens</b> for deck hatches	N.A. pack	N.A. pack	N.A. pack
<b>Simrad audio docking station SonicHub</b> with remote	N.A. pack	N.A. pack	N.A. pack
<b>BOSE® 2.1 speaker system</b> ACCOUSTIMASS 3, speakers with base unit in saloon	-	-	N.A. pack
<b>Saloon stereo speakers</b> x 2	N.A. pack	N.A. pack	-
<b>Cockpit speakers</b> x 2, watertight	N.A. pack	N.A. pack	N.A. pack
<b>LED TV 22"</b> mounted on an articulating arm on main saloon bulkhead to port of the forward cabin doorway and DVD player	-	□	□
<b>Amplified antenna for TV</b> for masthead mounting	-	□	□
<b>Air Conditioning</b> 220v 16000 BTU 1 unit installed under saloon seating, vents in saloon, forward and aft cabins control panel and thermostat (for 2 cabin version only)	□	-	-
<b>Air Conditioning</b> 220 v 24000 BTU 2 units installed under saloon seating and in stern, vents in saloon, head compartments and forward and aft cabins control panel and thermostat	-	□	-
<b>Air Conditioning</b> 220 v 32000 BTU 1 unit installed in the stern, 1 unit installed in the saloon and 1 unit installed in the forward cabin, vents in saloon, head compartments and forward and aft cabins control panel and thermostat	-	-	□
<b>Forced air heating</b> 1 unit 5500 BTU Webasto® diesel heater installed in stern, vents in aft cabin, saloon and head compartments	□	□	□
<b>Forced air heating</b> 1 unit 5500 BTU + 1 unit 2000 BTU Webasto® diesel heater installed in stern, vents in aft cabin, saloon and head compartments (only for the 4 cabins version)	-	-	□

▲ Performance package \* Navigation package ■ Standard □ Option - Not available

	SO 379		SO 409			SO 439		
	2C1/H	3C1/H	2C1/H	3C1/H	3C1/2H	2C1/2H	3C1/2H	4C1/2H
<b>INTERIOR FEATURES AND OPTIONS</b>								
<b>WOOD</b>								
<b>Fine Teak® interior</b> laminated panels with solid wood trim around galley, companionway and cabinetry, finished in satin UV stabilised varnish	■	■	■	■	■	■	■	■
<b>Laminate floorboards</b> with light-coloured lines, varnished edges	■	■	■	■	■	■	■	■
<b>Laminate floorboards</b> in an oak finish, varnished edges	□	□	□	□	□	□	□	□
<b>FORWARD CABIN</b>								
<b>Forward owner's cabin</b> with central berth and storage forward of the berth	■	■	■	■	■	■	■	-
Double berth, with wood trim, high-density foam mattress	6'10" x 6'1"	6'10" x 6'1"	6'11" x 6'7"	6'11" x 6'7"	6'11" x 6'7"	6'11" x 6'7"	7' x 6'7"	-
Deep cabinet with shelves and hanging rod	2	2	2	2	1	1	1	-
White vinyl lining on hull with lateral wood shelf	■	■	■	■	■	■	■	-
Desk/vanity with leatherette lining and fold-up mirror, reading light and chair with backrest	-	-	□	□	-	-	■	-
Private forward head compartment with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump	-	-	-	-	■	■	■	-
Plexiglass folding door for separate shower compartment	-	-	-	-	-	-	N.A. pack	-
<b>Double forward cabins</b> with 2 single bunk berths and forward V-berth	-	-	-	-	-	-	-	■
Double berth with wood trim, high-density foam mattress	-	-	-	-	-	-	-	2,14 x 2,00 m
Twin single bunks in separate cabin with storage locker	-	-	-	-	-	-	-	2,11 x 0,70 m
Deep cabinet with shelves and hanging rod	-	-	-	-	-	-	-	■
White vinyl lining on hull with lateral wood shelf	-	-	-	-	-	-	-	■
Forward head compartment with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump	-	-	-	-	-	-	-	■
Plexiglass folding door for separate shower compartment	-	-	-	-	-	-	-	N.A. pack
<b>AFT CABIN</b>								
<b>Aft owner's cabin</b> with access to starboard and large berth	■	-	■	-	-	■	-	-
Double berth with high-density foam mattress	6'8" x 6'4"	-	6'7" x 5'10"	-	-	6'7" x 5'10"	-	-
Deep cabinet with shelves and hanging rod	■	-	■	-	-	■	-	-
White vinyl lining on hull with lateral wood shelf	■	-	■	-	-	■	-	-
Large head compartment aft with sink, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink and electric drainage pump	■	-	■	-	-	■	-	-
Plexiglass folding door for separate shower compartment	■	-	■	-	-	■	-	-
<b>Locker and technical compartment</b> with access through head compartment, storage baskets, lighting and lots of extra space for storage under the exterior cockpit locker	■	-	■	-	-	■	-	-
<b>Twin aft cabins</b>	-	■	-	■	■	-	■	■
Double berths, high-density foam	-	6'8" x 5'2"	-	6'7" x 5'2"	6'7" x 5'2"	6'7" x 5'2"	6'7" x 5'3"	6'7" x 5'3"
Deep cabinet with shelves and hanging rod per cabin	-	■	-	■	■	-	■	■
White vinyl lining on hull with lateral wood shelf	-	■	-	■	■	-	■	■
Head compartment aft with sink, separate shower, clothes hook, mirror, towel holder, toilet paper holder, cabinet above sink, electric drainage pump, access from saloon	-	■	-	■	■	-	■	■
Plexiglass folding door for separate shower compartment	-	■	-	■	■	-	N.A. pack	N.A. pack
<b>NAVIGATION STATION</b>								
<b>Navigation station</b> full-function with general electrical panel, room for the latest in GPS chartplotters and bookshelf	■	■	■	■	■	■	■	■
Central nav desk with leatherette lining and interior storage	-	-	■	■	■	■	■	■
Hanging locker	■	-	-	-	-	-	-	-
<b>SALOON</b>								
<b>Saloon</b> with U-shaped seating area to starboard, wrap-around cushions and storage under seating area	■	■	■	■	■	■	■	■
Saloon dining table with wood fiddles, removable pedestal legs	■	■	■	■	■	■	■	■
Luxury saloon table with folding leaves and central bar cabinet	□	□	-	-	-	-	-	-
Luxury salon table with central bar unit, folding top, and sliding tracks to transform into double berth	-	-	□	□	□	□	□	□
Saloon berth conversion kit	□	□	□	□	□	□	□	□
Storage cabinets along hull sides	■	■	■	■	■	■	■	■
Lounge seating to port with plush cushions and upper storage cabinets	■	■	■	■	■	■	■	■
2 removable stools for saloon with tie-down kit	-	-	□	□	□	□	□	□
Companionway with wood steps and non-slip strips	■	■	■	■	■	■	■	■
Plexiglass companionway door with dedicated storage location	■	■	■	■	■	■	■	■
<b>GALLEY</b>								
<b>Galley</b> with double stainless steel sinks with covers, solid countertops, chrome plumbing fittings, storage cabinets and drawers	■	■	■	■	■	■	■	■
L-galley to port with glass separator between galley counter and seating area	■	■	■	■	■	■	■	■
Storage compartment for books and magazines built into the galley façade	■	■	■	■	■	■	■	■
Gimballed 2-burner stove with oven with stainless steel protection bar	■	■	■	■	■	■	■	■
Luxury 2-burner stove with black finish, wood handle, stainless steel oven/broiler	■	■	■	■	■	■	N.A. pack	N.A. pack
Single fridge box with freezer area, wire baskets, 12v refrigeration and integrated compressor	■	■	■	■	■	■	■	■
<b>HEAD ROOM</b>								
Forward cabin	5'11" / 6'		6'			6'2"		
Aft cabin (s)	6'3"		6'5"			6'6"		
Companionway	6'4"		6'4"			6'6"		
Saloon	5'11" / 6'4"		6'4"			6'5"		
Galley	6'2"		6'3"			6'5"		

■ Standard □ Option - Not available C = Cabins H = Head



JEANNEAU

JEANNEAU AMERICA INC. - 105 EASTERN AVENUE, SUITE 202, ANNAPOLIS MD 21403 - Tel 410.280.9400 - Fax 410.280.9401  
www.jeanneau.com

